




Strimech Pro-AG Bucket Range



Strimech's Pro-AG range of attachments, have been expertly designed and manufactured using the latest technology, ensuring all of our customers are supplied with the best attachments available. As part of our on-going commitment of offering superior quality products, we have made key improvements to our market leading range of buckets. An increased range of sizes and capacities enables customer's requirements to be catered for.

Key Features:

- Improved corner fills and side stiffeners offering greater strength and wear resistance.
- Rolled shell allows improved fixing location and improved tear-out.
- Boron 500 leading edge
- Extra wear plates fitted to base of bucket

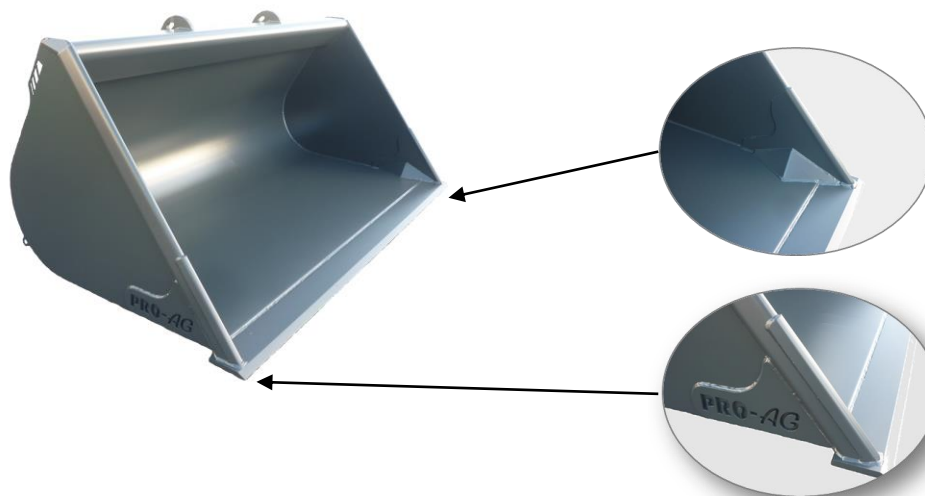

For Strength And Reliability Choose Strimech

<u>Model</u>	<u>Capacity</u>	<u>Height(mm)</u>	<u>Depth(mm)</u>	<u>Width(mm/ft)</u>	<u>Weight (Kgs)</u>
BKT10-56	0.6m ³	0.83m (2' 9")	1.04 (3' 5")	1670 (5'6")	320
BKT10-60	0.7m ³	0.83m (2' 9")	1.04 (3' 5")	1880 (6'0")	340
BKT10-66	0.8m ³	0.83m (2' 9")	1.04 (3' 5")	2030 (6'6")	360
BKT10-70	0.9m ³	0.83m (2' 9")	1.04 (3' 5")	2180 (7'0")	380
BKT10-76	1.0m ³	0.83m (2' 9")	1.04 (3' 5")	2350 (7'6")	400
BKT10-80	1.1m ³	0.83m (2' 9")	1.04 (3' 5")	2480 (8'0")	420
BKT15-56	1.1m ³	0.99m (3' 3")	1.25m (4' 1")	1675 (5'6")	390
BKT15-60	1.2m ³	0.99m (3' 3")	1.25m (4' 1")	1880 (6'0")	410
BKT15-60	1.3m ³	0.99m (3' 3")	1.25m (4' 1")	2030 (6'6")	430
BKT15-70	1.4m ³	0.99m (3' 3")	1.25m (4' 1")	2180 (7'0")	450
BKT15-76	1.5m ³	0.99m (3' 3")	1.25m (4' 1")	2350 (7'6")	470
BKT15-80	1.6m ³	0.99m (3' 3")	1.25m (4' 1")	2480 (8'0")	490
BKT17-60	1.4m ³	1.07m (3' 6")	1.36m (4' 6")	1880 (6'0")	440
BKT17-66	1.5m ³	1.07m (3' 6")	1.36m (4' 6")	2030 (6'6")	460
BKT17-70	1.6m ³	1.07m (3' 6")	1.36m (4' 6")	2180 (7'0")	480
BKT17-76	1.7m ³	1.07m (3' 6")	1.36m (4' 6")	2350 (7'6")	500
BKT17-80	1.8m ³	1.07m (3' 6")	1.36m (4' 6")	2480 (8'0")	520
BKT20-60	1.7m ³	1.14m (3' 9")	1.45m (4' 9")	1880 (6'0")	475
BKT20-66	1.8m ³	1.14m (3' 9")	1.45m (4' 9")	2030 (6'6")	495
BKT20-70	1.9m ³	1.14m (3' 9")	1.45m (4' 9")	2180 (7'0")	515
BKT20-76	2.0m ³	1.14m (3' 9")	1.45m (4' 9")	2350 (7'6")	535
BKT20-80	2.1m ³	1.14m (3' 9")	1.45m (4' 9")	2480 (8'0")	555
BKT25-60	2.1m ³	1.22m (4' 0")	1.59m (5' 3")	1880 (6'0")	530
BKT25-66	2.2m ³	1.22m (4' 0")	1.59m (5' 3")	2030 (6'6")	555
BKT25-70	2.3m ³	1.22m (4' 0")	1.59m (5' 3")	2180 (7'0")	580
BKT25-76	2.4m ³	1.22m (4' 0")	1.59m (5' 3")	2350 (7'6")	605
BKT25-80	2.5m ³	1.22m (4' 0")	1.59m (5' 3")	2480 (8'0")	630
BKT27-60	2.0m ³	1.28m (4' 3")	1.68m (5' 6")	1880 (6'0")	590
BKT27-66	2.2m ³	1.28m (4' 3")	1.68m (5' 6")	2030 (6'6")	615
BKT27-70	2.4m ³	1.28m (4' 3")	1.68m (5' 6")	2180 (7'0")	640
BKT27-76	2.6m ³	1.28m (4' 3")	1.68m (5' 6")	2350 (7'6")	665
BKT27-80	2.8m ³	1.28m (4' 3")	1.68m (5' 6")	2480 (8'0")	690
BKT30-70	2.6m ³	1.34m (4' 5")	1.74m (5' 9")	2180 (7'0")	680
BKT30-76	2.8m ³	1.34m (4' 5")	1.74m (5' 9")	2350 (7'6")	710
BKT30-80	3.0m ³	1.34m (4' 5")	1.74m (5' 9")	2480 (8'0")	740
BKT30-86	3.2m ³	1.34m (4' 5")	1.74m (5' 9")	2640 (8'6")	770

Additional sizes available upon request

For Strength And Reliability Choose Strimech